


FENCE MOUNTED FOR SWINGING/SLIDING GATES

Maximum security.

1050D SOLENOID OPERATED ELECTRO-MECHANICAL GATE LOCK

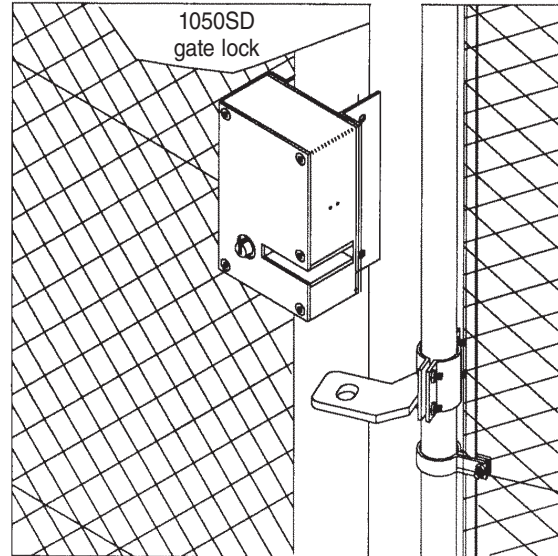

STANDARD FEATURES:

- Deadlock indication switch
- Mechanical latchback
- Six-tumbler lock
- Continuous duty solenoid
- Mounting hardware for 4" O.D. fence posts and 2" O.D. gate frame





NOTE:

Specify:

1050SD for swinging gate

Specify:

Swing Chart: Specify circled swing number when ordering.

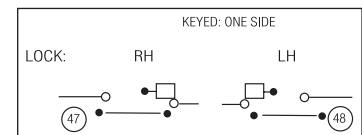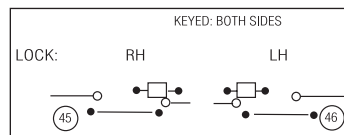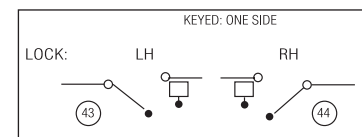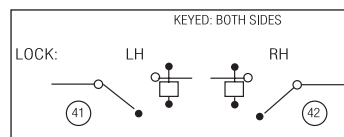

1050RD for sliding gate

TECHNICAL DATA:

- STANDARD FINISH: Galvanized
- COVER: 3/16" steel plate
- CASE: 1/8" steel plate
- LOCKING LUG: Cold-rolled, steel
- DEADBOLT: Stainless steel
- PARACENTRIC CYLINDER: Silicon bronze/copper alloy
- TUMBLERS: Spring tempered brass. Tumblers actuated by phosphor bronze springs, six

tumblers per lock

- LOCK SIZE: 11" H x 7" W x 3-13/16" D
- LOCK WEIGHT: 38 lbs.
- DEADBOLT SIZE: 5/8" diameter
- DEADBOLT THROW: 1"
- ELECTRICAL: 115 VAC, 1 phase, 60 Hz., 12 amp inrush current, 0.6 amp seated current

Detention Equipment by
SOUTHERN STEEL
 SINCE 1897