



## 1030A Deadlock



## Mechanical Locks



For More information please call 210-533-1231

# Mechanical Locks

## 1030A Deadlock



### STANDARD FEATURES

- Automatic deadlock
- Six heavy-duty tumblers
- Mounting fasteners

### APPLICATION

High security sliding doors at holding cells, medium-to-low traffic corridors and cutoff doors. Sliding door normally requires a Model 1300 Track Set.

### FUNCTION

Key activated unlocking. Hook bolt snaplocks upon closing. Final 3/8" of door travel pushes plunger pin against door jamb and deadlocks bolt.

### OPTIONAL FEATURES

**KNOB FUNCTION** - Knob will retract hook bolt. Knob on one side only. No key required. Specify "1030AK." Knob finish US26D.

**HOLLOW METAL MOUNTING** - Used for hollow metal door application. Specify "HM."

**GRATING DOOR MOUNTING** -  
Used for grating door application. Specify "G."


1030A-1: KEYED ONE SIDE  
1030A-2: KEYED BOTH SIDES

For More information please call 210-533-1231





# Mechanical Locks

## 1030A Deadlock

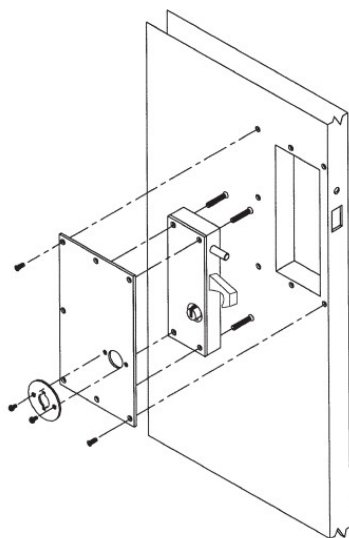

HM Mounting Shown

**Swing Chart:** Specify circled swing number when ordering.



\* Indicates lock mounting/access plate side.

## TECHNICAL DATA

|                      |                                  |
|----------------------|----------------------------------|
| Standard Finish      | Galvanized                       |
| Cover                | Cold-rolled Steel                |
| Case                 | Ductile iron                     |
| Hookbolt             | Cold-rolled, case-hardened steel |
| Paracentric Cylinder | Silicon bronze/ copper alloy     |
| Tumblers             | 6 tumblers per lock              |
| Lock Size            | 4.4" L x 3.15" H x 1.35" TK      |
| Lock Weight          | 3 lbs                            |
| Lockbolt Size        | 1-1/2" H x 3/4" TK               |
| Latchbolt            | 5/8" extended 1/2" travel        |



For More information please call 210-533-1231