



3165LX.b Electric Locking System



Locking Systems

For More information please call 210-533-1231



Locking Systems

3165LX.b Electric Locking System



STANDARD FEATURES

- Bottom door guide
 - Door hanger
 - Local mechanical release at cover box
 - Sloped-front cover box
 - Hinged cover panel for maintenance access
 - Vertical lock bar assembly
 - ASTM F1643 Certified
- Horizontal and Vertical Impact Test-Grade 1
- Prime paint finish

Specify "3165LX.bPKM-1"
for mogul keyed one side.
Specify "3165LX.bPKM-2"
for mogul keyed two sides

The 3165LX.b system includes several versions of a system designed for locking, unlocking and propelling sliding doors in safety vestibules, in dayrooms or in high-traffic corridors. Each 3165LX.b model utilizes an electric motor to operate the door through a rack and pinion drive mechanism. Doors are locked at top and bottom in both the open and closed positions by means of a concealed vertical lock bar at the rear jamb of the door. The vertical lock bar is deadlocked at a third locking point inside the horizontal cover box above the door. Standard clear door opening widths available are 3' 0" to 4' 6".

FUNCTION

ELECTRIC - A remote switch activates a motor which raises a vertical lock bar and propels the door open or closed.

MECHANICAL - Manual unlocking is provided for each device. After being manually released, door movement is by hand. The door automatically deadlocks when moved to the fully open or closed position.

OPTIONAL FEATURES

PILASTER RELEASE - Hip-high paracentric keyed mechanical release mounted in a full-height pilaster adjacent to the receiving jamb.

ELECTRIC KEYSWITCH -Paracentric or mogul keyed local electric control switch mounted below mechanical release mechanism in pilaster.

HOT DIP GALVANIZED FINISH - Available for external applications with lift-off cover panel only. Not available with standard hinged cover panel. Specify "G" when ordering. Example: 3165LX.b P-1G

REMOTE PANEL LOCK SYSTEM - Remote panel option is available with lift-off cover panel only. Not available with standard hinged cover panel. Specify "RP" when ordering. Example: 3165LX.bRP







For More information please call 210-533-1231

Locking Systems


3165LX.b Electric Locking System

DOOR SCHEDULE				
Door Height	Clear Opening	Frame Opening	Cover Box	Door Width
	3' - 0"	3' - 7"	7' - 4"	3' - 2 1/2"
	3' - 2"	3' - 9"	7' - 8"	3' - 4 1/2"
	3' - 4"	3' - 11"	8' - 0"	3' - 6 1/2"
	3' - 6"	4' - 1"	8' - 4"	3' - 8 1/2"
	3' - 8"	4' - 3"	8' - 8"	3' - 10 1/2"
	4' - 0"	4' - 7"	9' - 4"	4' - 2 1/2"
	4' - 4"	4' - 11"	10' - 0"	4' - 6 1/2"
	4' - 6"	5' - 1"	10' - 4"	4' - 8 1/2"

NOTE: Cover box minimum length = (7" overtravel) + (2 x clear opening) + 9". For doors exceeding 450 lbs. and/or greater than 4'-6" clear opening, contact factory. THREE HOUR FIRE DOOR RATING AVAILABLE. Standard cover box calculation does not apply to fire rated door.

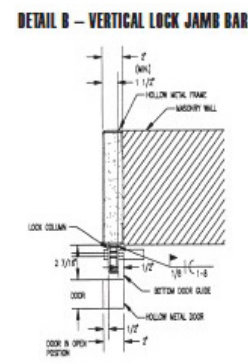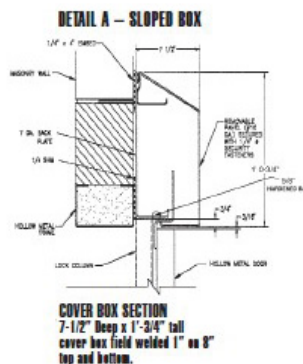

3165LX.bP-2 SLIDING DOOR SYSTEM

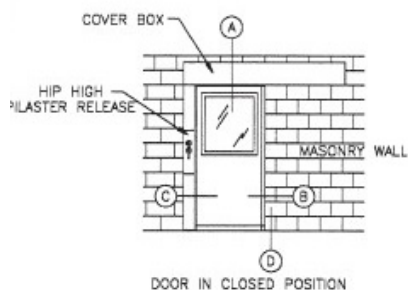

3165LX.bPKM-2 Shown

Note: Other system configurations and details are available. Call Customer Service for more information.

TECHNICAL DATA

Cover Box	1' 0 - 3/4' H x 7 - 1/2' D
Cover Box Material	7 gauge steel plate
Hinged Panel	10 gauge steel
Door Rollers	3" diameter, with sealed bearing
Vertical Lock Dar Dimensions	5/8" SQ by full height of door
Finish	Prime paint
Door Hanger	7 gauge steel plate
Locked Rotor Current	3.1A
Electrical	Motor: 1/8 HP, 115 VAC, 60 Hz., single phase power Inrush: 1.1A Running: .9A
Wire Requirements	When electric operation of the door is from a remote station, a minimum of five conductors (minimum 14 gauge) are required between the control point and the door, except for those models having the letter "K" (keyswitch) in the suffix. Keyswitch models require minimum six conductors

For More information please call 210-533-1231

