



8065L Pneumatically Operated Deadlatch



Locking Systems



For More information please call 210-533-1231

Locking Systems

8065L Pneumatically Operated Deadlatch



The 8065L series covers several versions of a system designed for locking, unlocking and propelling sliding doors in safety vestibules, in dayrooms or in high-traffic corridors.

Each 8065L model utilizes pneumatic cylinders to operate the door. Doors are locked at top and bottom in both the open and closed positions by means of a concealed vertical lock bar at the rear jamb of the door. The vertical lock bar is deadlocked at a third locking point inside the horizontal cover box above the door. Standard clear door opening widths available are 3'-0" to 4'-6".

FUNCTION

ELECTRIC - A remote switch activates pneumatic cylinders which raise a vertical lock bar and propel the door open or closed.

MECHANICAL - Manual unlocking is provided for each device. After being manually released, door movement is by hand. The door automatically deadlocks when moved to the fully open or closed position.

STANDARD FEATURES

- Bottom door guide
- Door hanger
- Local mechanical release at cover box
- Sloped-front cover box
- Hinged cover panel for maintenance access
- Vertical lock bar assembly
- ASTM F1643 Certified Horizontal and Vertical Impact Test-Grade 1
- Prime paint finish

OPTIONAL FEATURES

PILASTER RELEASE - Hip-high paracentric keyed mechanical release mounted in a full-height pilaster adjacent to the receiving jamb.

Specify "8065LP-1" keyed one side.

Specify "8065LP-2" keyed two sides.

ELECTRIC KEYSWITCH - Paracentric or mogul keyed local electric control switch mounted below mechanical release mechanism in pilaster.

HOT DIP GALVANIZED FINISH - Available for external applications with lift-off cover panel only. Not available with standard hinged cover panel.

Specify "G" when ordering. Example: 8065LP-1G
FACTORY-WIRED CONTROL CABLE Specify "8050LWC."

Specify "8065LPK-1" paracentric keyed one side.
Specify "8065LPK-2" paracentric keyed two sides.
Specify "8065LPKM-1" for mogul keyed one side.
Specify "8065LPKM-2" for mogul keyed two sides.




8065L Pneumatically Operated Deadlatch

DOOR SCHEDULE				
Door Height	Clear Opening	Frame Opening	Cover Box	Door Width
	3' - 0"	3' - 7"	7' - 4"	3' - 2 1/2"
	3' - 2"	3' - 9"	7' - 8"	3' - 4 1/2"
	3' - 4"	3' - 11"	8' - 0"	3' - 6 1/2"
	3' - 6"	4' - 1"	8' - 4"	3' - 8 1/2"
	3' - 8"	4' - 3"	8' - 8"	3'-10 1/2"
	4' - 0"	4' - 7"	9' - 4"	4' - 2 1/2"
	4' - 4"	4' - 11"	10' - 0"	4' - 6 1/2"
	4' - 6"	5' - 1"	10' - 4"	4' - 8 1/2"



NOTE: Cover box minimum length = (7" overtravel) + (2 x clear opening) + 9".

For doors exceeding 450 lbs. and/or greater than 4'-6" clear opening, contact factory.


THREE HOUR FIRE DOOR RATING AVAILABLE. Standard cover box calculation does not apply to fire rated door

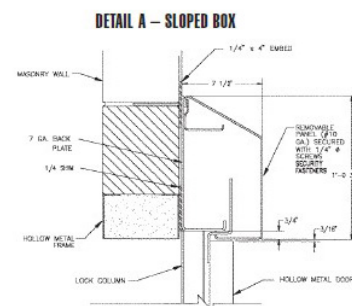

COVER BOX SECTION
7-1/2" deep x 1'-0-3/4" tall cover box
field welded 1" on 6" top and bottom




RECEIVER JAMB SECTION
Flush receiver jamb allows frame opening and clear opening to be the same.



DETAIL D – BOTTOM DOOR GUIDE SECTION

8050L PNEUMATIC SLIDING DOOR SYSTEM

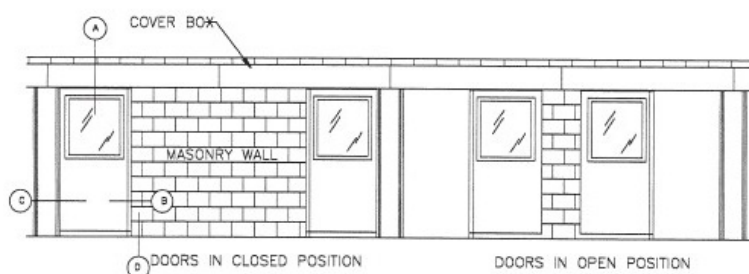

TECHNICAL DATA

Cover Box	1' 0 - 3/4' H x 7 - 1/2' D
Cover Box Material	7 gauge steel plate
Hinged Panel	10 gauge steel
Door Rollers	3" diameter, machined steel with sealed bearings.
Vertical Lock Bar Dimensions	5/8" SQ by full height of door
Finish	Prime paint
Door Hanger	7 gauge steel plate
Air Requirements	Air consumption 1.9 cubic inches per unlock operation at 80 PSIG.
Electrical	3.5 watts
Wire Requirements	Minimum of five 24 volt conductors are required between the control point and the door, except for those models having the letter "K" (keyswitch) in the suffix. Keyswitch models require minimum six conductors.



For More information please call 210-533-1231