



Key Switches



Southern Folger



For More information please call 210-123-4567

Accessories

Key Switches



APPLICATION

A typical application for a key switch in a correctional facility is for proximity key control of an RRBLS electromechanical sliding or swinging door lock. A key switch can provide an additional security measure where key unlocking of electric locks is routine. A key combination different from the lock's manual key, which can be safe-guarded for use during power interruptions only, operates the key switch. Also, the wiring of the key switch is configured to allow on and off power switching from a central control station. Thus, if the key to the switch cylinder is lost or seized, the key switch can be disabled to prevent unauthorized unlocking of the door.

201095 – Narrow Mortise Cylinder Key Switch

This narrow profile key switch is designed to mortise mount in the 2" trim surface of a standard hollow metal door frame.

- Units can be ordered with one or two momentary (MO) or

maintained (MA) action SPDT switches or a combination for actuation by clockwise and/or counter-clockwise key rotation to suit the application. Specify No. 201095 – 1MO or 2MO, or No. 201095 – 1MA or 2MA, or No.201095 – 1MO & 1MA, respectively.

- Electrical rating: 250VAC, 5A resistive; 30VDC, 3A inductive & 5A resistive.
- Accepts any manufactures standard 1-1/8" long mortise cylinder with a "Yale" shape cam.
- When ordered, can be supplied with quick disconnect wire leads (i.e. not standard).
- Optionally available with two LEDs (typically green and red).
- Standard faceplate finish – satin stainless steel (ANSI 630 , US32D).

201110 – Standard Mortise Cylinder Key Switch

This key switch is designed to mount in a 2" x 4" electrical outlet box - 2" minimum depth (e.g. Raco handy box No. 674, shown, or equal). Features are identical to Model No. 201095.

201065 – Paracentric Key Switch

This key switch is ordinarily used in jails and prisons to complement an RRBLS lever tumbler keying system.

- Normally fitted with two momentary (snap) action SPDT switches (Form C) for actuation by clockwise and/or counterclockwise key rotation. Electrical rating: 125/250VAC, 15A resistive. Standard models available in one (No. 201065-1) or two side (No. 201065-2) keying.
- Furnished with quick-disconnect wire leads.
- Electroplated steel parts.




Accessories

Key Switches


201070 – Mogul Cylinder Key Switch

This key switch employs an institutional style Mogul cylinder.

- Standard model accepts RRBLS Mogul cylinder (2.000" x 27 thread x 1-3/4" long x Yale type cam). The 201070 can be adapted for use with other manufacturers' Mogul cylinders by special order.
- Normally fitted with two momentary action SPDT switches (Form C) for actuation by clockwise and/or counterclockwise key rotation. Electrical rating: 125/250VAC, 15A resistive.
- Optionally available with one or two shatter resistant LED's in green and red as specified.
- Furnished with quick-disconnect wire leads.
- Standard faceplate – electroplated steel.

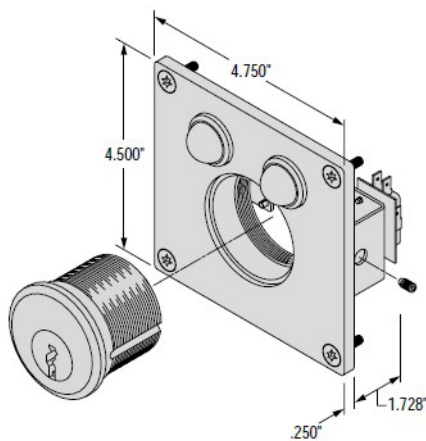


Note: Keys for Mogul cylinder must be ordered separately.

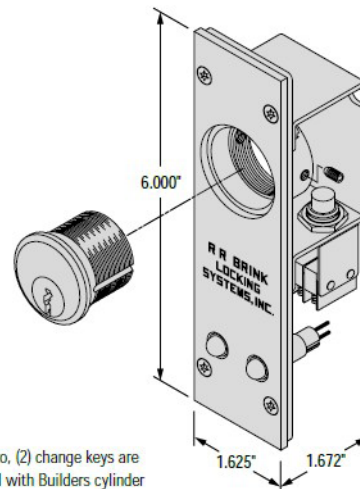


Note: Two, (2) change keys are furnished with Builders cylinder

201110 – Key Switch

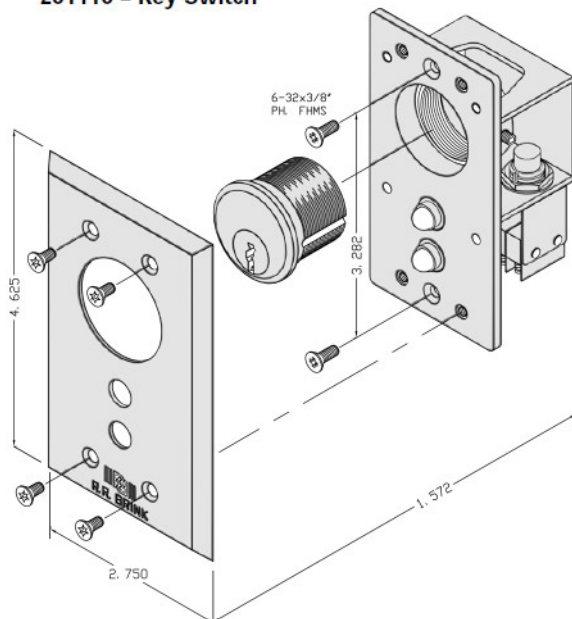

Note: Two, (2) change keys are furnished with Builders cylinder

201065 – Paracentric Key Switch

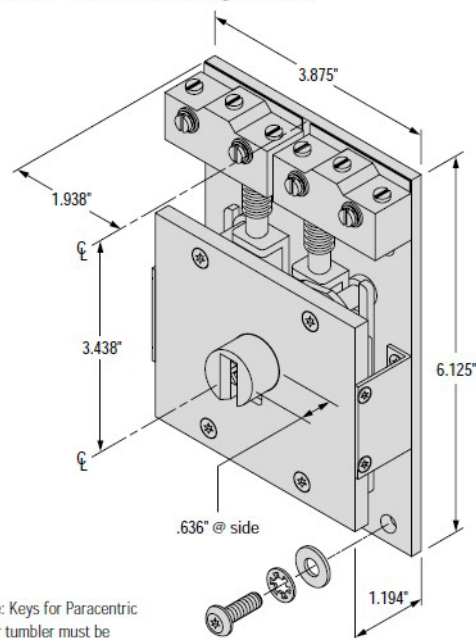

Note: Keys for Paracentric lever tumbler must be ordered separately.



For More information please call 210-123-4567

Accessories

900 Series Momentary Pushbutton



Model 907



Model 906


906 Momentary Push Button

RATING: 10 amp **USAGE:** Heavy-duty switch for electric locks, except for functions requiring a maintained contact switch. Suitable for inmate use. Finish US26D.

907 Push Button

RATING: 6 amp **USAGE:** This function is the same as the 906. Faceplate is not available. The 907 pushbutton becomes an integral part of the frame. Finish US32D.

900 Series Keywitches

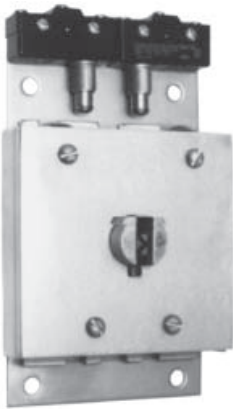

Model 930A



930 THREE POSITION MAINTAINED KEYSWITCH, PARACENTRIC

RATING: 15 amp **USAGE:** Extra heavy-duty keyswitch for sliding door locking device. Galvanized finish. Utilizes paracentric key and cylinder. Specify one or two way keying.

936 THREE POSITION MAINTAINED KEYSWITCH, MOGUL

RATING: 15 amp **USAGE:** Heavy duty keyswitch for sliding door locking devices. US26D is standard cylinder finish, US32D is standard plate finish. Utilizes institutional (mogul-type) key and cylinder.

