



10120AP Pneumatically Operated Deadlatch



Pneumatic Locks

For More information please call 210-533-1231



Pneumatic Locks

10120AP Pneumatically Operated Deadlatch



STANDARD FEATURES

- Deadlock indication switch
- Mechanical latchback
- Six tumbler lock
- Plug connector
- Solenoid valve
- Fail secure
- Mounting fasteners
- Mechanical key holdback
- Adjustable roller bolt

10120AP-1: KEYED ONE SIDE
10120AP-2: KEYED BOTH SIDES

APPLICATION

Medium and maximum security swinging doors that are to be unlocked from a remote location. Jamb mounted. Door position indicator switch, door closer and heavy duty door pull are recommended.

FUNCTION

ELECTRIC - Remote switch activates a pneumatic cylinder which retracts the latchbolt. Latchbolt remains retracted until door is opened approximately 2", then it releases, automatically latches and deadlocks when the door is closed.

MECHANICAL - Latchbolt is retracted with a mogul key at the door, and remains retracted until door is opened approximately 2", then it releases, automatically latches and deadlocks when the door is closed.

OPTIONAL FEATURES

NO LATCHBACK - Latchbolt remains retracted as long as control switch is activated. Latchbolt extends when power is removed. Specify "NL."

EMERGENCY EXIT DOOR HOLDBACK - Deadbolt retracted by solenoid or by key, extended by key only (no snaplatch feature). When deadbolt is extended, lock is deadlocked. Specify "EED." UL listing not available with this function.


EMERGENCY EXIT RELEASE From remote location latchbolt can be retracted and held retracted until released from remote station. Requires a second pneumatic tube to the lock and an emergency reserve air system. Specify "EER." UL listing not available with this function.




For More information please call 210-533-1231

Pneumatic Locks

10120AP Pneumatically Operated Deadlatch

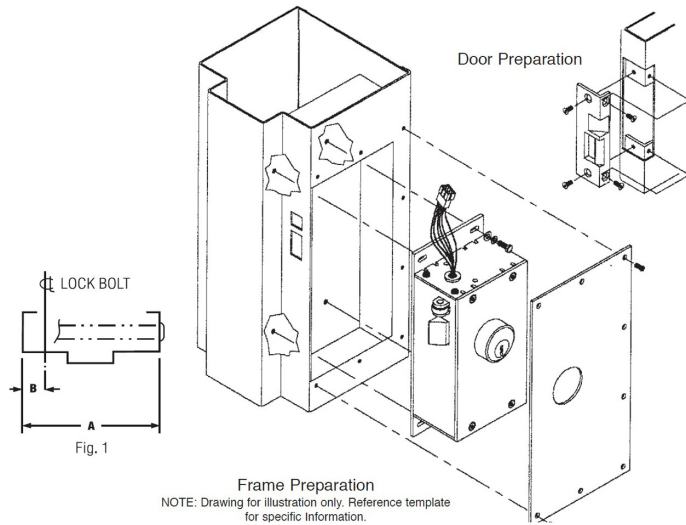

Swing Chart: Specify circled swing number when ordering.

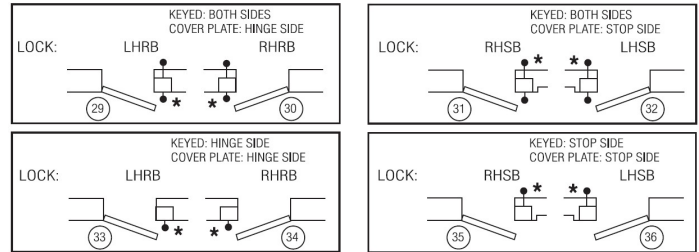

* Indicates both mounting/access plate side.

TECHNICAL DATA

Standard Finish	Galvanized
Cover	10 gauge steel plate
Case	10 gauge steel plate
Strike	Stainless Steel
Latchbolt	1-12" H x 3/4" TK Stainless Steel
Lock Size	12" H x 5-7/16" W 3-12" D
Lock Weight	19lbs
Latchbolt Throw	1"
Mogul Cylinder	US26D
Deadlock Actuator	Stainless steel
Mogul Keys	Nickel Silver
Pin Tumblers	Combination nickel silver and stainless steel, 6 tumblers per lock
Electrical	24 VDC 1.5 watt continuous duty
Air Requirement	Consumption: 1.1 cubic inches per operation. Supply pressure: 80-100 P.S.I. at the door

**UL Listed burglary resistant under UL 1034.
ASTM F 1577 Certified Impact Test-Grade 1**

For More information please call 210-533-1231

