



1051E Solenoid Operated Electro-Mechanical Deadlatch



Electric Locks



For More information please call 210-533-1231

Electric Locks

1051E Solenoid Operated Electro-Mechanical Deadlatch



APPLICATION

Medium and maximum security swinging doors that are to be unlocked from a remote location. Jamb mounted. Door position indicator switch, door closer and heavy duty door pull are recommended.

FUNCTION

ELECTRIC - Remote switch activates a solenoid which retracts the latchbolt. Latchbolt remains retracted until door is opened approximately 2", then it releases, automatically latches and deadlocks when the door is closed.

MECHANICAL - Latchbolt is retracted by a paracentric key at the door and remains retracted until door is opened approximately 2", then it releases, automatically latches and deadlocks when the door is closed.

Automatic deadlatch feature is suspended when paracentric key is rotated to mechanical key hold-back position. Normal function is resumed when key is returned to deadlocked position.

OPTIONAL FEATURES

NO LATCHBACK - Latchbolt remains retracted as long as control switch is activated. Latchbolt extends when power is removed. Specify "NL."

EMERGENCY EXIT DOOR HOLDBACK - Dead bolt retracted by solenoid or by key, extended by key only (no snap latch feature). When dead bolt is extended, lock is deadlocked. UL Listing for fire door not available with this function. Specify "EED."


1051E-1: KEYED ONE SIDE
1051E-2: KEYED BOTH SIDES

For More information please call 210-533-1231




Electric Locks

1051E Solenoid Operated Electro-Mechanical Deadlatch

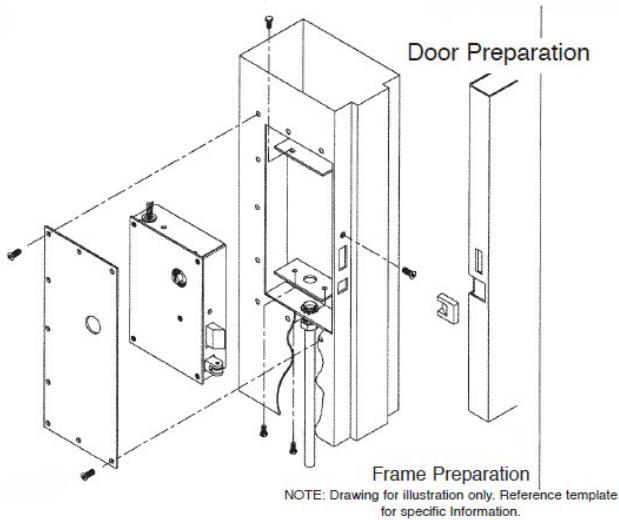

Swing Chart: Specify circled swing number when ordering.

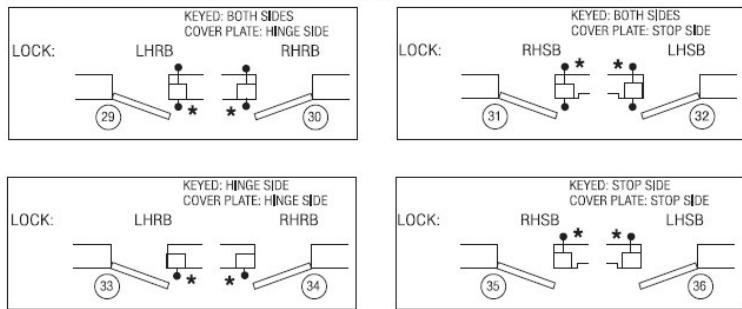

* Indicates lock mounting/access plate side.

TECHNICAL DATA

Standard Finish	Galvanized
Cover	3/16" steel plate
Case	3/16" steel plate
Locking	Cold-rolled, steel
Latchbolt	2" x 3/4" Stainless steel
Paracentric Cylinder	Silicon bronze/copper alloy
Tumblers	Six tumblers per lock.
Lock Size	13-3/8"H x 9"W x 3-1/8" D
Lock Weight	50 lbs.
Latchbolt Throw	1"
Electrical	115 VAC, 1 phase, 60 Hz., 12 amp inrush current, 0.6 amp seated current

UL Listed for use on three-hour fire doors. • UL Listed as burglary resistant.
ASTM F 1577 Certified Impact Test-Grade 1.



For More information please call 210-533-1231