



## 1080A Deadlock



## Mechanical Locks

For More information please call 210-533-1231



# Mechanical Locks

## 1080A Deadlock



### STANDARD FEATURES

- Manual deadlock
- Six heavy-duty tumblers
- Mounting fasteners

### APPLICATION

For swinging cell, corridor, storage room and high security doors where slamlocking is not required.

### FUNCTION

Key activated locking and unlocking. Deadlocks in both locked and unlocked position.

### OPTIONAL FEATURES

**HOLLOW METAL MOUNTING** - Used for hollow metal door application. Specify "HM."

**GRATING DOOR MOUNTING** - Used for grating door application. Specify "G."

**PLATE DOOR MOUNTING** - Used for steel plate door application. Specify "P." 470CL Bolt Keeper with switch.

**GRATING DOOR MOUNTING** - Used for grating door application. Specify "G."


1080A-1: KEYED ONE SIDE  
1080A-2: KEYED BOTH SIDES



For More information please call 210-533-1231


# Mechanical Locks

## 1080A Deadlock

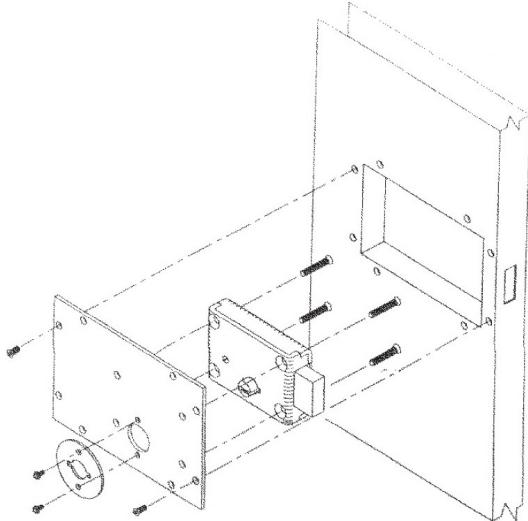

HM Mounting Shown

**Swing Chart:** Specify circled swing number when ordering.

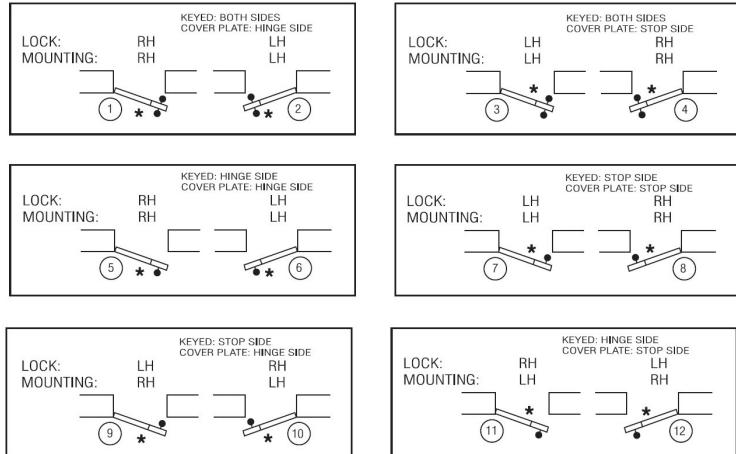

\* Indicates lock mounting/access plate side.

## TECHNICAL DATA

<b>Standard Finish</b>	Galvanized
<b>Cover</b>	Steel
<b>Case</b>	Steel
<b>Deadlock Actuator</b>	2" H x 3/4" TK Stainless Steel
<b>Paracentric Cylinder</b>	Silicon bronze/ copper alloy
<b>Tumblers</b>	6 tumblers per lock
<b>Lock Size</b>	9" L x 5" H x 1-1/2" TK
<b>Lock Weight</b>	11 lbs
<b>Lockbolt Size</b>	2" H x 3/4" TK
<b>Lockbolt Throw</b>	3/4"
<b>Latchbolt</b>	Stainless steel with (2) 1/4" diameter case-hardened steel insert pins

UL Listed for use on three hour fire doors.

For More information please call 210-533-1231

